

lamaPLC: PCF857x I/O Expander chip/modul with I²C communication

The PCF857x series consists of I²C-based general-purpose I/O (GPIO) expanders manufactured by NXP and Texas Instruments. They allow microcontrollers (such as Arduino, ESP32, or Raspberry Pi) to control multiple digital pins with only two wires: Serial Data (SDA) and Serial Clock (SCL).



Feature	PCF8574 / PCF8574A	PCF8575
GPIO Count	8-bit (8 pins)	16-bit (16 pins)
I²C Base Address	0x20 (PCF8574) / 0x38 (PCF8574A)	0x20
Max Devices on 1 Bus	8 units	16 units
Operating Voltage	2.5V to 6V	2.5V to 5.5V
Interrupt Output	Yes (Open-drain INT)	Yes (Open-drain INT)

The current limits of the PCF857x are heavily lopsided because of its quasi-bidirectional architecture. It handles current entirely differently depending on whether you are sinking current (outputting 0/LOW) or sourcing it (outputting 1/HIGH).

Main Control & Power Header

- **VCC:** Power input. Connects to **3.3V or 5V** to match your microcontroller's logic levels.
- **GND:** Common ground reference.
- **SDA:** Serial Data line for I²C communication.
- **SCL:** Serial Clock line for I²C communication.
- **INT:** Interrupt output (Active Low). Pulls low to alert the microcontroller when an input pin changes state, eliminating the need for software polling.

8/16-Bit I/O Extension Pins

- **Port 0** (P00 to P07): The first group of 8 quasi-bidirectional GPIO pins.
- **Port 1** (PCF8575 only, P10 to P17): The second group of 8 quasi-bidirectional GPIO pins.

Sinking Current (Output LOW / Connecting to Ground)

- **Maximum per individual pin:** 25 mA (typical) / 20 mA for extended use.
- **Maximum combined total (all 16 pins combined):** 100 mA.
- **The Math:** If you activate all 16 pins simultaneously at LOW logic, you can only allocate a maximum of 6.25 mA per pin ($100\text{ mA} \div 16$) to avoid overloading the chip.


Sourcing Current (Output HIGH / Connecting to VCC)

This is the weak mode meant mostly for sensing state changes.

- **Maximum per individual pin:** Only 100 μ A (0.1 mA).
- **The Limit:** This current is too weak to directly light up an LED or actuate a standard relay trigger.

How to Correctly Wire Components

- **Correct (Sinking):** Connect your load's positive wire to VCC, and the negative side (through a current-limiting resistor) directly to the PCF8575 I/O pin. Setting the pin LOW completes the path to ground and activates the load.
- **Incorrect (Sourcing):** Connecting your load's positive wire to the PCF8575 I/O pin and the negative side to Ground will fail, as the pin cannot supply sufficient current.

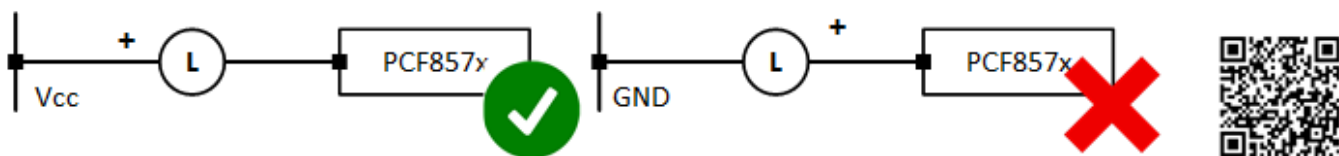

<https://lamapl.com/doku.php?id=sensor:pcf857x>



I²C topics on lamaPLC

Page	Date	Tags
• lamaPLC Communication: 1-Wire	2026/04/23 21:51	1-wire, communication, bus, microlan, i2c, uart, usart, ds18b20
• lamaPLC Communication: I²C	2025/09/23 21:25	i2c, i c, smbus, philips, bus, communication, arduino
• lamaPLC project: Sension SCD CO² measurement module	2026/04/15 19:34	scd30, scd40, scd41, iaq, ndir, sensor, i2c, arduino code
• LamaPLC: AHT10 Modul	2026/03/22 03:14	communication, i2c, temperature, humidity, sensor, aht, aht 10, modul
• LamaPLC: AHT20 / BMP280 Modul	2026/04/23 21:52	bmp280, aht20, adafruit, temperature, humidity, pressure, sensor, arduino, code, i2c
• LamaPLC: APDS - Avago ALS and proximity detection sensors with I²C communication	2026/04/23 21:52	avago, apds-9900, apds-9930, apds-9960, als, proximity, detection, gesture recognition, gesture, i2c, communication, sensor, arduino, code
• lamaPLC: Arduino Modul: BME680	2026/05/12 18:40	code, c, 2026, arduino, bme680, sensor, i2c, comunication
• lamaPLC: AS5600 Magnetic Induction Angle Measurement Sensor Module	2026/04/23 21:52	communication, i2c, as5600, as-5600, magnetic, induction, angle, sensor
• lamaPLC: Bi-Directional Logic Level Converter 3.3V ↔ 5V	2026/04/12 00:34	bi-directional, logic level converter, i2c, uart, spi
• LamaPLC: BMP/BME Bosch Temperature/Humidity/Pressure sensors with I²C communication	2026/04/23 21:52	bme280, bme680, bme688, bmp180, bmp280, hw-611, hw611, bosch, temperature, humidity, pressure, sensor, arduino, i2c, communication, ai, cjmcu, volatile organic compounds, vocs, volatile sulfur compounds, vscs, iaq

- [LamaPLC: CJMCU-219/INA-219 breakout board/IC with I²C communication](#) 2026/04/23 21:52 [cjmcu-219, ina-219, ina219, breakout board, i2c, communication, sensor, voltage, current, arduino, code, cjmcu](#)
- [LamaPLC: CJMCU-3216 / AP-3216 integrated digital ambient light and proximity sensor module/IC with I²C communication](#) 2026/04/23 21:52 [cjmcu-3216, cjmcu, ap-3216, ap3216, ambient light, proximity, sensor, arduino, code, i2c, communication](#)
- [lamaPLC: CJMCU-811 CCS811 Gas Sensor \(VOCs TVOC CO2\)](#) 2026/04/23 21:52 [cjmcu-811, ccs811, gas, sensor, vocs, tvoc, eco2, co2, arduino, air quality metal oxide, mox, i2c, micropython, rp2040-eth](#)
- [LamaPLC: D6T Omron Non-Contact Thermal Sensors with I²C communication](#) 2026/04/23 21:52 [d6t, d6t-32l, d6t-44l, d6t-8l, d6t-1a, omron, non-contact, thermal, sensor, i2c, arduino, code](#)
- [LamaPLC: DPS Infineon Temperature/Pressure sensors with I2C communication](#) 2026/04/23 21:52 [dps310, infineon, temperature, pressure, sensor, arduino, i2c, communication, code](#)
- [lamaPLC: Energy, power, current, and voltage](#) 2025/05/31 23:32 [i2c, i c, communication, arduino, energy, power, current, sensor, ina226](#)
- [LamaPLC: ENS ScioSense Multi-gas sensors with I²C communication](#) 2026/04/23 21:52 [ens160, sciosense, gas-quality, i2c, communication, sensor, arduino, code, eco2, tvoc, aqi, indoor air quality, iaq, co2, voc](#)
- [lamaPLC: ESP32 / ESP8266](#) 2025/11/22 00:07 [esp8266, esp32, esp32-c2, esp32-c3, esp32-c5, esp32-c6, esp32-c61, esp32-h2, esp32-s2, esp32-s3, esp32-p4, espressif systems, communication, ethernet, ip, wi-fi, thread, zigbee, matter, homekit, bluetooth, mqtt, adc, spi, uart, i2c, i2s, rmt, pwm, usb, usb otg, twai](#)
- [LamaPLC: Gas sensors](#) 2023/07/01 17:29 [gas, sensor, i2c, onewire, communication, mq-3, mq-4, mq-5, mq-6, mq-7, mq-8, mq-9, mq-135, gm-102b, gm-302b, gm-502b, gm-702b, alcohol, ch4, natural gas, smoke, lng, co, co2, lpg, h2, iso-butane, nox, nh3, benzene, town gas, formaldehyde, propane, humidity, temperature, voc, grv gas sens v2](#)
- [lamaPLC: GY-511 6DOF sensor module](#) 2026/03/22 01:44 [stmicroelectronics, lsm303dlhc, i2c, lsm303, sensor, gy-511, 6dof, pololu, module, arduino](#)
- [LamaPLC: GY-9250 MPU-9250/6500 9-axis Attitude Sensor Board](#) 2026/04/23 21:52 [ak8963, gy-9250, mpu-9250, 9-axis, motion detection, magnetometer, communication, i c, i2c, spi](#)
- [LamaPLC: HDC Texas Instruments Temperature/humidity sensors with I²C communication](#) 2026/04/23 21:52 [sht21, htu21, si7021, gy-21, gy-213v, hdc1080, gy-213v-hdc1080, cjmcu, cjmcu-1080, texas instruments, temperature, humidity, sensor, i2c, communication, arduino, code](#)
- [lamaPLC: HT16K33 display controller](#) 2026/04/23 21:51 [i2c, 7-segment display, display, ht16k33, arduino](#)

• LamaPLC: HTU TE Connectivity temperature/humidity sensors with I²C communication	2026/04/23 21:52	htu, htu31d, htu21d, htu20d, sht20, htu20, sht21, htu21, si7021, gy-21, gy-213v, hdc1080, si702, gy-20, sht31, htu31, si7031, gy-31, te connectivity, temperature, humidity, i2c, communication, sensor, arduino, code i2c, i c, communication, arduino, energy, power, current, monitor, sensor, ina219, gy-219, ina226, gy-216, ina228, gy-228, ina237, ina238, ina260, ina3221, ina
• lamaPLC: INA modules with Arduino libraries	2026/04/11 19:54	i2c, i c, communication, arduino, energy, power, current, monitor, sensor, ina219, gy-219, ina226, gy-216, ina228, gy-228, ina237, ina238, ina260, ina3221, ina
• lamaPLC: INA226 - current/voltage/power monitor with I²C communication	2026/04/23 21:52	i2c, i c, communication, arduino, energy, power, current, monitor, sensor, ina226, ina219, ina
• lamaPLC: LCD 1602/2004 with I²C communication	2026/02/14 18:27	communication, i2c, display, lcd, 1602, 2004, hd44780, pcf8574, pcf8574t, pcf8574at, arduino
• LamaPLC: MAX30100/MAX30102 Heart Rate Click Sensor Module	2026/04/23 21:52	max30102, max30100, heart rate click, sensor, communication, i2c, arduino, code
• lamaPLC: MCP23017 / MCP23S17 16-Bit I/O Expander with Serial Interface I²C / SPI	2026/04/23 21:52	communication, i2c, mcp23017, mcp23s17, spi, i o expander, serial, cjmcu-2317, cjmcu
• lamaPLC: MLX90614 (GY-906) infrared non-contact thermometer	2026/05/08 00:03	communication, i2c, temperature, mlx90614, gy-906, modul, infrared, non-contact thermometer, dsp, pwm, smbus, hailege
• lamaPLC: PCF857x I/O Expander chip/modul with I²C communication	2026/05/14 15:21	communication, i2c, pcf857x, pcf8574, pcf8574a, pcf8575, i o expander, i o extension, nxp, texas instruments
• LamaPLC: Pixart PAJ7620U2 Gesture recognition sensors/module with I²C communication	2026/04/23 21:52	paj7620u2, gy-paj7620, pixart, gesture recognition, i2c, communication, sensor, arduino, code
• lamaPLC: RP2040_ETH_Modul: I²C scanner	2026/05/12 16:20	code, micropython, 2026, rp2040 eth, i2c, comunication
• lamaPLC: RP2040_ETH_Modul: MLX90614 simple	2026/05/12 17:06	code, micropython, 2026, rp2040 eth, i2c, communication, mlx90614
• lamaPLC: RP2040_ETH_Modul: Read BME 680/688 sensor data	2026/05/12 21:06	code, micropython, 2026, rp2040 eth, bme680, i2c, sensor, communication
• lamaPLC: RP2040_ETH_Modul: Read BME 680/688 sensor data and store in Modbus input registers	2026/05/12 18:58	code, micropython, 2026, rp2040 eth, bme680, i2c, sensor, communication
• LamaPLC: SC16IS750 / SC16IS752: One or two serial (UART) ports from microcontroller via I²C or SPI communication	2026/04/23 21:52	cjmcu-750, cjmcu-752, cjmcu, nxp, sc16is750, sc16is752, uart, serial, i2c, spi, modul, converter, arduino, code
• LamaPLC: SGP Sensirion TVOC/VOC sensors with I²C communication	2026/04/15 19:41	sgp30, sgp40, sgp41, sensirion, gas-sensor, i2c, communication, sensor, arduino, code, eco2, voc, tvoc, indoor air quality, iaq, nox, hydrogen

- LamaPLC: SHT Sensirion Temperature/humidity sensor with I²C communication

 2026/04/23
21:52

[sht20](#), [sht21](#), [sht25](#), [sht30](#), [sht31](#), [sht35](#), [sht40](#), [gy21](#), [temperature](#), [humidity](#), [i2c](#), [communication](#), [sensor](#), [arduino](#), [code](#)
- lamaPLC: Signal level converters

 2026/02/14
23:47

[pca9306](#), [i2c](#), [voltage](#), [level](#), [converter](#)
- lamaPLC: TCA9548A (HW617); Low-Voltage 8-Channel I²C Switch Module

 2026/02/14
23:51

[tca9548a](#), [hw617](#), [i2c](#), [switch](#), [communication](#), [expansion board](#), [arduino](#)
- lamaPLC: TM1637 7-segment display

 2026/02/14
18:26

[i2c](#), [7-segment display](#), [display](#), [tm1637](#), [arduino](#)
- LamaPLC: TOFnnnC STMicroelectronics Time-of-Flight (ToF) sensors with I²C communication

 2026/04/23
21:52

[tof050c](#), [vl6180](#), [tof200c](#), [vl53l0x](#), [tof400c](#), [vl53l1x](#), [stmicroelectronics](#), [time-of-flight](#), [tof](#), [i2c](#), [communication](#), [sensor](#), [arduino](#), [code](#)
- LamaPLC: VL53Lnn STMicroelectronics time-of-flight (ToF) laser-ranging sensors with I²C communication

 2026/04/23
21:52

[vl53l0x](#), [vl53l1x](#), [vl53l0 1xv2](#), [gy-530](#), [time-of-flight](#), [tof](#), [laser-ranging](#), [i2c](#), [communication](#), [sensor](#), [arduino](#), [code](#)
- LamaPLC: VL6180X STMicroelectronics Time-of-Flight (ToF) sensor with I²C communication

 2026/04/23
21:52

[vl6180x](#), [stmicroelectronics](#), [time-of-flight](#), [tof](#), [i2c](#), [communication](#), [sensor](#), [arduino](#), [code](#)
- Magnetic angle sensors

 2026/03/05
21:19

[magnetic angle sensor](#), [magnetic flux sensor](#), [spi](#), [i2c](#), [pwm](#), [communication](#), [modul](#), [as5047p](#), [as5600](#), [mt6701](#), [mt6816](#), [mt6835](#), [tle5012b](#), [amr](#), [gmr](#), [tmr](#), [anisotropic magnetoresistive](#)
- SSH1106/SSD1306 OLED Display with I²C communication

 2026/02/14
18:27

[i2c](#), [oled](#), [display](#), [ssd1306](#), [sh1106](#), [ssh1106](#), [arduino](#), [cmos](#)

[communication](#), [i2c](#), [PCF857x](#), [PCF8574](#), [PCF8574A](#), [PCF8575](#), [I/O Expander](#), [I/O Extension](#), [I2C](#), [NXP](#), [Texas Instruments](#)

This page has been accessed for: Today: 11, Until now: 11

From:

<http://lamaplc.com/> - **lamaPLC**

Permanent link:

<http://lamaplc.com/doku.php?id=sensor:pcf857x&rev=1778767895>

Last update: **2026/05/14 16:11**

