

# LamaPLC: XTM35SC Energy meter with Modbus communication

Other unit names:



- **VE EMDIN02**

The XTM35SC is an inexpensive current meter that can be purchased (e.g. on Amazon). It measures consumption, voltage and current on one phase. It does not require an external measuring ring. Suitable for home automation and smaller equipment. Of course, it is not MID compliant. The measurement results can also be queried remotely via Modbus RTU communication.

## Description:


- 35 mm standard rail mounting according to the DIN EN50022 standard.
- Bipolar width (module 17.5mm), conforms to the DIN43880 standard
- Standard configuration 5 + 1 digit display (9999999.1kWh) LCD. Function can be selected (display voltage current, power, frequency, power factor).
- Setup measurement single-phase two-wire active energy consumption. It's nothing to do with the direction of load current flow. Compliance with GB / T17245.321-2008 standard.

## Specification:

- Power supply: 230V, 1 phase
- Current: 5 (80) A
- Accuracy class: 1.0
- Frequency: 50/60Hz
- Display mode: LCD 5+1 digits = 99999.9 kWh
- Power Consumption:  $\leq 0.4$ W (8VA)
- Temperature range: -20 to 65 °C
- LED: 1 flashing / pulsing
- Pulse output: 1000 imp/kWh
- Voltage: 12 to 27V
- Current: 27mA
- Pulse value: 90 ms
- Model: XTM35SC
- Accuracy: Class 1
- Voltage: 220V
- Current: 5□30A 15/15□60A Optional (optional)

- Insulation performance: AC voltage 4kv for 1 minute, 1.2/50us waveform pulse voltage 6kv
- Size: 80 x 65 x 35mm / 3.15 x 2.56 x 1.38inch

## Wiring

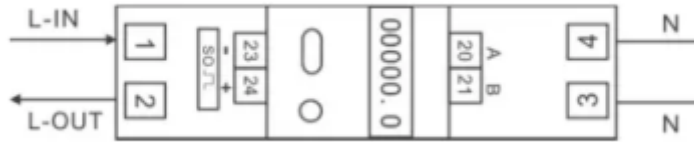

## Modbus maps

RS485 communication interface, MODBUS RTU protocol:

- Baudrate: 9600 Baud
- Parity: Even
- Databits: 8
- Stopbits: 1

### 32 bit (2 words) input registers

The registers are read-only.

Register Nr	32 bit address	Description	Note
30000	0	Voltage (V)	
30008	4	Current (A)	
30018	9	Power (W)	
30026	13	Volt-ampere reactive (var)	
30042	21	Power factor - Leistungsfaktor (pf - W/VA)	
30054	27	Frequency - Frequenz (Hz)	
30256	128	Energy - Energie (kWh)	

### 32 bit (2 words) holding registers

The registers are read / write.

Register Nr	32 bit address	Description	Note
40000	0	Baudrate	Default value: 9600
40008	4	-	-
40012	6	-	-
40016	8	Modbus RTU Address	Default value: 45
40024	12	-	Default value: 1000
40032	16	-	-

## Modbus topics on lamaPLC

Page	Date	Tags
• <a href="#">Eastron Modbus maps</a>	2026/04/23 21:51	<a href="#">modbus</a> , <a href="#">modbus rtu</a> , <a href="#">eastron</a> , <a href="#">modbus map</a> , <a href="#">mid</a>
• <a href="#">lamaLib: #temp</a>	2026/04/23 21:52	<a href="#">tia</a> , <a href="#">scl</a> , <a href="#">lamalibsimatic</a> , <a href="#">source code</a> , <a href="#">energy meter</a> , <a href="#">modbus</a> , <a href="#">register</a> , <a href="#">word</a>
• <a href="#">lamaLib: energyMeterToModbusRegs</a>	2026/04/23 21:52	<a href="#">tia</a> , <a href="#">scl</a> , <a href="#">lamalibsimatic</a> , <a href="#">source code</a> , <a href="#">energy meter</a> , <a href="#">modbus</a> , <a href="#">register</a> , <a href="#">word</a>
• <a href="#">lamaPLC Communication: Modbus</a>	2026/04/23 21:51	<a href="#">modbus</a> , <a href="#">communication</a> , <a href="#">bus</a> , <a href="#">modicon</a> , <a href="#">standard</a> , <a href="#">rtu</a> , <a href="#">tcp</a> , <a href="#">multimaster</a> , <a href="#">coil</a> , <a href="#">register</a>
• <a href="#">lamaPLC: B+G E-Tech DS100 Energy Meter with Modbus</a>	2026/06/05 15:59	<a href="#">communication</a> , <a href="#">modbus</a> , <a href="#">b g</a> , <a href="#">e-tech</a> , <a href="#">ds100</a> , <a href="#">energy meter</a> , <a href="#">em</a>
• <a href="#">lamaPLC: Communication with Eastron Smart X96</a>	2026/06/05 15:59	<a href="#">communication</a> , <a href="#">modbus</a> , <a href="#">energy meter</a> , <a href="#">em</a> , <a href="#">eastron</a> , <a href="#">smart</a> , <a href="#">x96</a>
• <a href="#">lamaPLC: DM56A04 / DM36B06 digital tube display with Modbus Communication</a>	2026/02/14 18:25	<a href="#">dm56a04</a> , <a href="#">dm36b06</a> , <a href="#">eletechsup</a> , <a href="#">7-segment</a> , <a href="#">display</a> , <a href="#">modbus</a> , <a href="#">rtu</a> , <a href="#">modbus rtu</a> , <a href="#">arduino</a>
• <a href="#">LamaPLC: Eastron SDM 230 with Modbus Communication</a>	2026/06/05 15:50	<a href="#">modbus</a> , <a href="#">modbus rtu</a> , <a href="#">eastron</a> , <a href="#">modbus map</a> , <a href="#">mid</a> , <a href="#">sdm 230</a> , <a href="#">sdm</a> , <a href="#">arduino</a> , <a href="#">code</a>
• <a href="#">LamaPLC: Eastron SDM 630 Energy Meter with Modbus communication</a>	2026/06/05 15:50	<a href="#">modbus</a> , <a href="#">modbus rtu</a> , <a href="#">eastron</a> , <a href="#">modbus map</a> , <a href="#">mid</a> , <a href="#">sdm</a> , <a href="#">sdm 630</a> , <a href="#">arduino</a> , <a href="#">code</a>
• <a href="#">lamaPLC: PTA8C04 4-channel PT100 Modbus Modul</a>	2026/02/14 18:42	<a href="#">pta8c04</a> , <a href="#">sensor</a> , <a href="#">modbus</a> , <a href="#">rtu</a> , <a href="#">rs-485</a> , <a href="#">communication</a> , <a href="#">platine</a> , <a href="#">um72</a>
• <a href="#">lamaPLC: RP2040_ETH_Modul: Modbus TCP example</a>	2026/05/12 16:20	<a href="#">code</a> , <a href="#">micropython</a> , <a href="#">2026</a> , <a href="#">rp2040 eth</a> , <a href="#">modbus</a> , <a href="#">test</a>
• <a href="#">lamaPLC: RP2040_ETH_Modul: Modbus TCP sniffer</a>	2026/05/12 16:20	<a href="#">code</a> , <a href="#">micropython</a> , <a href="#">2026</a> , <a href="#">rp2040 eth</a> , <a href="#">modbus</a> , <a href="#">sniffer</a>
• <a href="#">LamaPLC: S7-1500 and Metrawatt EM2389 Modbus TCP communication</a>	2026/04/23 21:52	<a href="#">simatic</a> , <a href="#">s7</a> , <a href="#">modbus</a> , <a href="#">communication</a> , <a href="#">metrawatt</a> , <a href="#">em2389</a> , <a href="#">source code</a> , <a href="#">scl</a> , <a href="#">mid</a>
• <a href="#">LamaPLC: S7-1500 and Sicam Q200 Modbus TCP communication</a>	2026/04/23 21:52	<a href="#">simatic</a> , <a href="#">s7</a> , <a href="#">modbus</a> , <a href="#">tia portal</a> , <a href="#">communication</a> , <a href="#">sicam</a> , <a href="#">q200</a> , <a href="#">sicam q200</a> , <a href="#">source code</a> , <a href="#">scl</a> , <a href="#">class a</a>
• <a href="#">lamaPLC: S7-1500 and UICPAL Temp.humi.sensor Modbus TCP communication</a>	2023/06/19 23:24	<a href="#">bus</a> , <a href="#">communication</a> , <a href="#">s7</a> , <a href="#">simatic</a> , <a href="#">s7 1500</a> , <a href="#">s7 1200</a> , <a href="#">scl</a> , <a href="#">uicpal</a> , <a href="#">temperature</a> , <a href="#">humidity</a> , <a href="#">modbus</a> , <a href="#">example</a> , <a href="#">download</a> , <a href="#">tia portal</a>
• <a href="#">lamaPLC: TM1650 7-Segment Display with I<sup>2</sup>C like or Modbus Communication</a>	2026/02/14 18:26	<a href="#">tm1650</a> , <a href="#">stc8g</a> , <a href="#">tp8485e</a> , <a href="#">hyuduo5x1b64edtk1244</a> , <a href="#">7-segment</a> , <a href="#">display</a> , <a href="#">modbus</a> , <a href="#">rtu</a> , <a href="#">modbus rtu</a> , <a href="#">arduino</a>
• <a href="#">lamaPLC: TTL to RS485 Module</a>	2026/02/14 23:49	<a href="#">modbus</a> , <a href="#">rtu</a> , <a href="#">modbus rtu</a> , <a href="#">hw-097</a> , <a href="#">rs-485</a> , <a href="#">max485</a>
• <a href="#">LamaPLC: UICPAL Temp.humi.sensor</a>	2023/06/25 00:43	<a href="#">simatic</a> , <a href="#">s7</a> , <a href="#">modbus</a> , <a href="#">communication</a> , <a href="#">temperature</a> , <a href="#">humidity</a> , <a href="#">sensor</a>
• <a href="#">LamaPLC: XTM35SC Energy meter with Modbus communication</a>	2026/06/05 15:59	<a href="#">xtm35sc</a> , <a href="#">modbus</a> , <a href="#">modbus rtu</a> , <a href="#">measuring</a> , <a href="#">power</a> , <a href="#">communication</a> , <a href="#">current meter</a> , <a href="#">voltmeter</a>
• <a href="#">lamaPLC: YR-3180 - Weight sensor module with UART or Modbus communication</a>	2026/02/15 00:00	<a href="#">communication</a> , <a href="#">modbus</a> , <a href="#">rtu</a> , <a href="#">sensor</a> , <a href="#">weight</a> , <a href="#">yr-3180</a> , <a href="#">hx710b</a> , <a href="#">arduino</a> , <a href="#">ttl</a> , <a href="#">rs-485</a>

- [Modbus for Grundfos pumps](#) 2026/04/23 21:51 [modbus](#), [modbus tcp](#), [modbus rtu](#), [grundfos](#)
- [NT18B07: 7 Kanal RS485 Temperatur Sensor with Modbus RTU](#) 2026/02/14 18:49 [nt18b07](#), [sensor](#), [modbus](#), [rtu](#), [rs-485](#), [communication](#), [platine](#)
- [Simatic Modbus S7 error- and statuscodes](#) 2026/04/23 21:52 [communication](#), [bus](#), [modbus](#), [error](#), [modbus error code](#), [7000](#), [7001](#), [7002](#), [7003](#), [7004](#), [7005](#), [7006](#), [80a1](#), [simatic](#), [s7](#), [siemens](#), [tia](#)
- [Waveshare](#) 2026/04/23 21:52 [waveshare](#), [converter](#), [modbus](#), [modbus rtu](#), [modbus tcp](#), [communication](#)
- [XTM35SC current / voltage meter](#) 2026/04/23 21:52 [xtm35sc](#), [modbus](#), [modbus rtu](#), [measuring](#), [power](#), [communication](#), [current meter](#), [voltmeter](#)

[xtm35sc](#), [modbus](#), [modbus rtu](#), [measuring](#), [power](#), [communication](#), [current meter](#), [voltmeter](#)

This page has been accessed for: Today: 6, Until now: 6

From:

<https://lamaplc.com/> - **lamaPLC**

Permanent link:

[https://lamaplc.com/doku.php?id=meas:xm\\_35\\_sc&rev=1780669152](https://lamaplc.com/doku.php?id=meas:xm_35_sc&rev=1780669152)

Last update: **2026/06/05 16:19**

