


lamaPLC: RD-xx - Ai-Thinker Radar Module with UART communication

The Ai-Thinker RD-xx series comprises 24 GHz mmWave radar modules, each optimized for varying levels of human detection and tracking complexity. While all use FMCW technology, their primary differences lie in connectivity, target tracking capabilities, and power requirements.

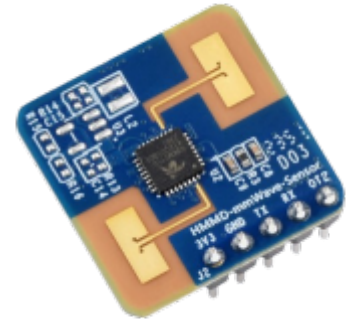

Comparison of RD-01, RD-03, and RD-03D:

Feature	RD-01	RD-03	RD-03D
Primary Focus	Human presence + Wireless	Precise motion/presence	Multi-target trajectory tracking
Connectivity	UART, Wi-Fi, BLE 5.0	UART	UART
Detection Range	Up to 5 meters	Up to 6.5 meters	Up to 8 meters
Detection Angle	$\pm 60^\circ$ (Horizontal)	$\pm 60^\circ$ (Horizontal)	$\pm 60^\circ$ (Azimuth), $\pm 30^\circ$ (Pitch)
Target Tracking	Single presence/motion	Single presence/motion	Up to 3 targets simultaneously
Data Output	Presence, micro-motion	Presence, micro-motion	X/Y coordinates, speed, distance
UART Baud Rate	115200 (Default)	115200 (Default)	256000 (Default)
Power Supply	3.0V - 3.6V	3.0V - 3.6V	5V (Stable)
Size	35 x 18 mm	20 x 20 mm	15 x 44 mm


Key Differentiators

- **RD-01:** The only one in this group with integrated Wi-Fi and Bluetooth (via BL602 chip). It is designed for smart home products that need to report human presence directly to a cloud or app without an external gateway.
- **RD-03:** A cost-optimized, standalone version of the RD-01 without wireless features. It offers higher bandwidth (1 GHz) for better interference resistance and is ideal for simple “occupied/unoccupied” triggers such as lighting.
- **RD-03D:** The most advanced in the series. Unlike the others, it provides a spatial map of up to three people, showing their exact positions in a room (X and Y coordinates) and their speed.




Rd-03 is an electrostatically sensitive piece of equipment; special precautions should be taken during handling.

PIN out




3V3	input power
GND	Ground
OT1	UART_TX
RX	UART_RX
OT2	Detection result output, output high level when sensing, output low level when not sensing

 If you'd like to support the development of the site with the price of a coffee — or a few — [please do so here](#).


Here's a handy tip: you can quickly save this page as a PDF by clicking "export to PDF" in the menu on the right side of the screen.

2026/02/14 23:38

Characteristics of perception

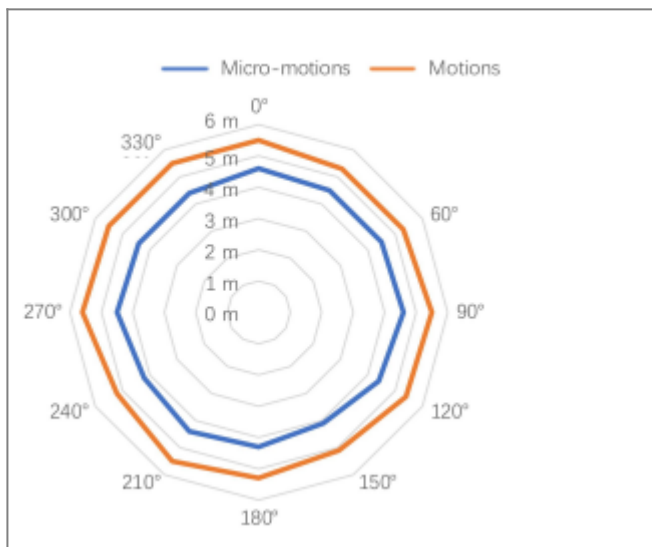

Characteristics of a sensor installed on the ceiling, approximately 2.6 to 3 meters high.

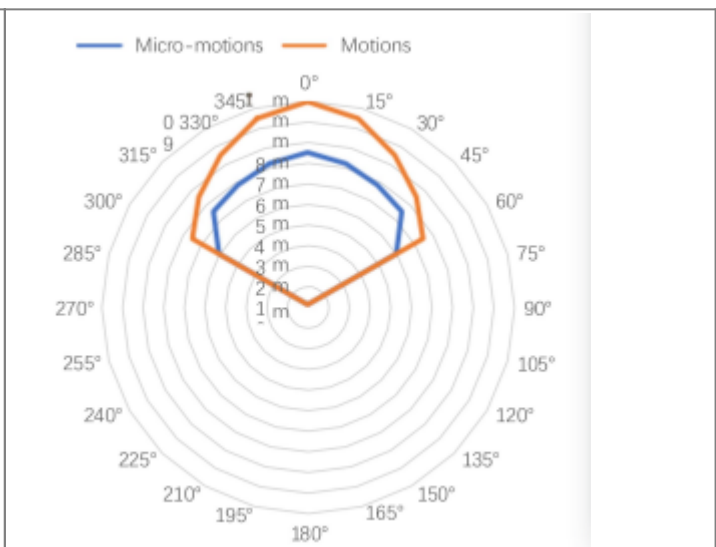

Horizontal characteristic of a sensor mounted on a wall, approximately 1.5 to 2 meters high.

RD-03 Arduino example

To connect the Ai-Thinker RD-03 to an Arduino reliably, use a dedicated library such as [RD03Radar](#). This library simplifies the interpretation of complex 24 GHz mmWave data packets by translating them into straightforward presence and motion indicators.

Pinout

The RD-03 requires a stable 3.0V – 3.6V power supply and communicates via UART at a default baud rate of 115200.

- VCC → Arduino 3.3V
- GND → Arduino GND
- RX → Arduino TX (e.g., Pin 17 for ESP32/Mega)
- TX → Arduino RX (e.g., Pin 16 for ESP32/Mega)

Arduino code

```
#include <RD03Radar.h>

// Use a HardwareSerial port (e.g., Serial2 on ESP32 or Serial1 on Mega)
// On Uno, you may need SoftwareSerial, but performance may be limited.
RD03Radar radar(Serial2);

void onPresenceChange(RD03PresenceState state, float distance) {
  if (state == RD03PresenceState::MOTION_DETECTED) {
    Serial.print("Motion detected at: ");
    Serial.print(distance);
    Serial.println(" cm");
  } else if (state == RD03PresenceState::STATIONARY_DETECTED) {
    Serial.println("Subject is stationary (e.g., breathing detected).");
  } else {
    Serial.println("Area is clear.");
  }
}

void setup() {
  Serial.begin(115200);

  // Set detection callback
  radar.onPresenceChange(onPresenceChange);

  // Start radar (provide RX and TX pins for ESP32)
  radar.begin(16, 17);
  Serial.println("RD-03 Radar Initialized");
}

void loop() {
  // Required to process incoming serial data
  radar.loop();
}
```

Sources

<https://cdn.robotshop.com/media/A/Ait/RB-Ait-27/pdf/ai-thinker-radar-module-rd-03-datasheet.pdf>

Sensor topics on lamaPLC

Page	Date	Tags
<ul style="list-style-type: none"> • lamaPLC project: Arduino - OLED SH1106 with AHT20/BMP280 Sensor 	2026/04/23 21:51	bmp280, aht20, temperature, humidity, pressure, sensor, arduino, oled, sh1106, arduino code
<ul style="list-style-type: none"> • lamaPLC project: Arduino - Vibration sensors 	2026/04/15 17:21	vibration, sensor, piezoelectric, mems, eddy-current, electrodynamic, gxfm0459, ldtm-028k, arduino, arduino code
<ul style="list-style-type: none"> • lamaPLC project: Digitales Potentiometer Board Modul 	2026/04/11 18:29	sensor, module, arduino code, renesas, x9c series, x9c102, x9c103, x9c104, x9c503, xdcp, digitally controlled potentiometer
<ul style="list-style-type: none"> • lamaPLC project: Sension SCD CO² measurement module 	2026/04/15 19:34	scd30, scd40, scd41, iaq, ndir, sensor, i2c, arduino code
<ul style="list-style-type: none"> • lamaPLC: A0221AU / A02YYUW Waterproof Ultrasonic Distance Sensor with UART communication 	2026/04/23 21:52	a0221au, a02yyuw, waterproof, ultrasonic, distance, sensor, uart, ip67, serial, sen0311, dfrobot
<ul style="list-style-type: none"> • LamaPLC: AHT10 Modul 	2026/03/22 03:14	communication, i2c, temperature, humidity, sensor, aht, aht 10, modul
<ul style="list-style-type: none"> • LamaPLC: AHT20 / BMP280 Modul 	2026/04/23 21:52	bmp280, aht20, adafruit, temperature, humidity, pressure, sensor, arduino, code, i2c
<ul style="list-style-type: none"> • LamaPLC: Allegro ACS758 Hall-effect linear current sensors 	2026/04/23 21:52	cjmcu, cjmcu-758, acs758, acs758lcb-050b, acs758lcb-100b, acs758kcb-150b, acs758ecb-200b, hall-effect, current, sensor, analog, arduino, code
<ul style="list-style-type: none"> • LamaPLC: APDS - Avago ALS and proximity detection sensors with I²C communication 	2026/04/23 21:52	avago, apds-9900, apds-9930, apds-9960, als, proximity, detection, gesture recognition, gesture, i2c, communication, sensor, arduino, code
<ul style="list-style-type: none"> • lamaPLC: Arduino Modul: BME680 	2026/05/12 18:40	code, c, 2026, arduino, bme680, sensor, i2c, comunication
<ul style="list-style-type: none"> • lamaPLC: AS5600 Magnetic Induction Angle Measurement Sensor Module 	2026/05/13 00:06	communication, i2c, as5600, as-5600, magnetic, induction, angle, sensor
<ul style="list-style-type: none"> • LamaPLC: BMP/BME Bosch Temperature/Humidity/Pressure sensors with I²C communication 	2026/04/23 21:52	bme280, bme680, bme688, bmp180, bmp280, hw-611, hw611, bosch, temperature, humidity, pressure, sensor, arduino, i2c, communication, ai, cjmcu, volatile organic compounds, vocs, volatile sulfur compounds, vscs, iaq

<ul style="list-style-type: none"> • LamaPLC: BQ25570 / CJMCU-2557 - Texas Instruments nano-power management IC and module 	2026/04/23 21:52	bq25570, sensor, texas instruments, nano-power management, dc-dc boost charger, mppt, solar, thermoelectric, piezoelectric, energy harvesting, eh
<ul style="list-style-type: none"> • LamaPLC: CJMCU-219/INA-219 breakout board/IC with I²C communication 	2026/04/23 21:52	cjmcu-219, ina-219, ina219, breakout board, i2c, communication, sensor, voltage, current, arduino, code, cjmcu
<ul style="list-style-type: none"> • LamaPLC: CJMCU-3216 / AP-3216 integrated digital ambient light and proximity sensor module/IC with I²C communication 	2026/04/23 21:52	cjmcu-3216, cjmcu, ap-3216, ap3216, ambient light, proximity, sensor, arduino, code, i2c, communication
<ul style="list-style-type: none"> • LamaPLC: CJMCU-3901/PMW-3901 compact optical flow sensor module/IC by PixArt with SPI communication 	2026/04/23 21:52	cjmcu-3901, cjmcu, pmw3901, pmw-3901, optical flow, sensor, pixart, spi, communication, arduino, code, pmw3901mb-txqt
<ul style="list-style-type: none"> • LamaPLC: CJMCU-6701: Biosensor for measuring Galvanic Skin Response (GSR) with SPI communication 	2026/04/23 21:52	cjmcu, cjmcu-6701, acs758, acs-758, galvanic skin response, gsr, electrodermal activity, eda, spi, communication, arduino, code, sensor, healthcare
<ul style="list-style-type: none"> • LamaPLC: CJMCU-6814 combined gas sensor module for CO, NO₂, NH₃ 	2026/04/23 21:52	analog, cjmcu, cjmcu-6814, mics6814, mics-6814, sensor, arduino, code, carbon monoxide, co, ammonia, nh ₃ , nitrogen dioxide, no ₂
<ul style="list-style-type: none"> • lamaPLC: CJMCU-811 CCS811 Gas Sensor (VOCs TVOC CO₂) 	2026/04/23 21:52	cjmcu-811, ccs811, gas, sensor, vocs, tvoc, eco2, co2, arduino, air quality metal oxide, mox, i2c, micropython, rp2040-eth
<ul style="list-style-type: none"> • LamaPLC: CJMCU-8221 Analog Devices Precision instrumentation amplifier module 	2026/04/23 21:52	cjmcu-8221, ad8221ar, analog devices, amplifier, sensor, cjmcu
<ul style="list-style-type: none"> • LamaPLC: D6T Omron Non-Contact Thermal Sensors with I²C communication 	2026/04/23 21:52	d6t, d6t-32l, d6t-44l, d6t-8l, d6t-1a, omron, non-contact, thermal, sensor, i2c, arduino, code
<ul style="list-style-type: none"> • LamaPLC: DHT Temperature /Humidity sensors with 1-wire / I²C communication 	2026/04/23 21:52	dht11, dht20, dht22, temperature, humidity, pressure, sensor, 1-wire, arduino, code
<ul style="list-style-type: none"> • LamaPLC: DPS Infineon Temperature/Pressure sensors with I²C communication 	2026/04/23 21:52	dps310, infineon, temperature, pressure, sensor, arduino, i2c, communication, code
<ul style="list-style-type: none"> • lamaPLC: DS18B20 1-Wire Digital Thermometer 	2026/04/23 21:52	ds18b20, sensor, 1-wire, communication, arduino, thermometer, parasitic mode
<ul style="list-style-type: none"> • lamaPLC: Energy, power, current, and voltage 	2025/05/31 23:32	i2c, i c, communication, arduino, energy, power, current, sensor, ina226
<ul style="list-style-type: none"> • LamaPLC: ENS ScioSense Multi-gas sensors with I²C communication 	2026/04/23 21:52	ens160, sciosense, gas-quality, i2c, communication, sensor, arduino, code, eco ₂ , tvoc, aqi, indoor air quality, iaq, co ₂ , voc
<ul style="list-style-type: none"> • lamaPLC: ENS160 + AHT21 Air Quality Sensor - CO, ECO, TVOC, Temp & Humidity Module 	2026/04/23 21:52	arduino, ens160, aht21, air quality, sensor, co, eco, tvoc, module, aqi

<ul style="list-style-type: none"> • LamaPLC: Gas sensors 	<p>2023/07/01 17:29</p>	<p>gas, sensor, i2c, onewire, communication, mq-3, mq-4, mq-5, mq-6, mq-7, mq-8, mq-9, mq-135, gm-102b, gm-302b, gm-502b, gm-702b, alcohol, ch4, natural gas, smoke, lng, co, co2, lpg, h2, iso-butane, nox, nh3, benzene, town gas, formaldehyde, propane, humidity, temperature, voc, grv gas sens v2</p>
<ul style="list-style-type: none"> • LamaPLC: GM MEMS Gas-sensors 	<p>2026/04/23 21:52</p>	<p>gm-102b, gm-302b, gm-502b, gm-702b, mems, gas-quality, sensor, arduino, code, nitrogen dioxide, no2, volatile organic compounds, voc, carbon monoxide, co, ethyl alcohol, c2h5ch, formaldehyde, ch2o, alcohol, c2h5oh</p>
<ul style="list-style-type: none"> • lamaPLC: GY-511 6DOF sensor module 	<p>2026/04/23 21:52</p>	<p>stmicroelectronics, lsm303dlhc, i2c, lsm303, sensor, gy-511, 6dof, pololu, module, arduino</p>
<ul style="list-style-type: none"> • LamaPLC: HC-SR04 Ultrasonic Sensor Module 	<p>2026/04/23 21:52</p>	<p>hc-sr04, ultrasonic, sensor, arduino, code</p>
<ul style="list-style-type: none"> • LamaPLC: HDC Texas Instruments Temperature/humidity sensors with I²C communication 	<p>2026/04/23 21:52</p>	<p>sht21, htu21, si7021, gy-21, gy-213v, hdc1080, gy-213v-hdc1080, cjmcu, cjmcu-1080, texas instruments, temperature, humidity, sensor, i2c, communication, arduino, code</p>
<ul style="list-style-type: none"> • LamaPLC: HTU TE Connectivity temperature/humidity sensors with I²C communication 	<p>2026/04/23 21:52</p>	<p>htu, htu31d, htu21d, htu20d, sht20, htu20, sht21, htu21, si7021, gy-21, gy-213v, hdc1080, si702, gy-20, sht31, htu31, si7031, gy-31, te connectivity, temperature, humidity, i2c, communication, sensor, arduino, code</p>
<ul style="list-style-type: none"> • LamaPLC: HX711 24-bit analog-to-digital converter (ADC) 	<p>2026/04/11 18:28</p>	<p>hx711, hx-711, analog-to-digital, adc, converter, load cell, wheatstone bridge, weight, sensor, communication, arduino, code</p>
<ul style="list-style-type: none"> • lamaPLC: INA modules with Arduino libraries 	<p>2026/04/23 21:52</p>	<p>i2c, i c, communication, arduino, energy, power, current, monitor, sensor, ina219, gy-219, ina226, gy-216, ina228, gy-228, ina237, ina238, ina260, ina3221, ina</p>
<ul style="list-style-type: none"> • lamaPLC: INA226 - current/voltage/power monitor with I²C communication 	<p>2026/04/23 21:52</p>	<p>i2c, i c, communication, arduino, energy, power, current, monitor, sensor, ina226, ina219, ina</p>
<ul style="list-style-type: none"> • lamaPLC: LTC3588 - Nanopower energy harvesting power supply IC 	<p>2026/04/23 21:52</p>	<p>communication, arduino, sensor, energy harvesting, eh, energy, ambient power</p>
<ul style="list-style-type: none"> • LamaPLC: M01 - V0.4 Laser ranging sensor with UART communication 	<p>2026/04/23 21:52</p>	<p>distance measurement, laser, distance, sensor, m01</p>
<ul style="list-style-type: none"> • LamaPLC: MAX30100/MAX30102 Heart Rate Click Sensor Module 	<p>2026/04/23 21:52</p>	<p>max30102, max30100, heart rate click, sensor, communication, i2c, arduino, code</p>
<ul style="list-style-type: none"> • lamaPLC: Max31865 RTD to Digital Converter - PT100/PT1000 Platine 	<p>2026/04/23 21:52</p>	<p>max31865, rtd, pt 100, pt 1000, temperature, spi, platinum, arduino, code, sensor, adafruit</p>

• LamaPLC: MAX4466/MAX9814: Low-noise Microphone Preamplifiers	2026/04/23 21:52	audio, microphone, analogue audio, max4466, max9814, max 4466, max 9814, agc, preamplifiers, sensor, arduino, code
• LamaPLC: MH-Z19 series of NDIR CO₂ sensors	2026/04/23 21:52	mh-z19, mh-z19d, mh-z19c, mh-z19b, mh-z19e, ndir, co ₂ , sensor, winsen, uart, pwm, communication, non-dispersive infrared, infrared, ir, temperature, arduino, code, tasmota
• lamaPLC: MPU-6050 (HW-123, GY-521) 6-axis MotionTracking device	2026/04/23 21:52	mpu-6050, hw-123, gy-521, 6-axis motiontracking, dmp, temperature, sensor, mems, arduino code, arduino, accelerometer, gyroscope, tilt
• LamaPLC: MQ Winsen Gas-sensors	2026/04/23 21:52	mq, mq-2, mq-3, mq-4, mq-5, mq-6, mq-7, mq-8, mq-9, mq-131, mq-135, mq-137, winsen, gas-sensor, sensor, arduino, code, alcohol, c ₂ h ₅ oh, benzine gas, smoke, lpg, propane, c ₃ h ₈ , hydrogen, h ₂ , methane, ch ₄ , iso-butane, town gas, ammonia, nh ₃
• LamaPLC: PIR sensors	2026/04/23 21:52	hc-sr501, hc-sr505, am-312, ekmb ekmc, pir, motion, sensor, arduino, code
• LamaPLC: Pixart PAJ7620U2 Gesture recognition sensors/module with I²C communication	2026/04/23 21:52	paj7620u2, gy-paj7620, pixart, gesture recognition, i ² c, communication, sensor, arduino, code
• lamaPLC: PT100 / PT1000	2025/09/23 18:59	pt100, pt1000, temperature, sensor, platine, rtd
• lamaPLC: PTA8C04 4-channel PT100 Modbus Modul	2026/02/14 18:42	pta8c04, sensor, modbus, rtu, rs-485, communication, platine, um72
• LamaPLC: RCWL - Microwave radar sensor	2026/04/23 21:52	rcwl-0516, rcwl, microwave, radar, sensor, arduino, code
• lamaPLC: RD-xx - Ai-Thinker Radar Module with UART communication	2026/04/23 21:52	radar, s3km1110, fmcw, rd-01, rd-03, rd-03d, ai-thinker, k-band, 24 ghz, sensor, distance, micro-movements
• lamaPLC: RP2040_ETH_Modul: Read BME 680/688 sensor data	2026/05/12 21:06	code, micropython, 2026, rp2040 eth, bme680, i ² c, sensor, communication
• lamaPLC: RP2040_ETH_Modul: Read BME 680/688 sensor data and store in Modbus input registers	2026/05/12 21:04	code, micropython, 2026, rp2040 eth, bme680, i ² c, sensor, communication
• LamaPLC: Sensors	2026/04/15 19:42	sensor
• LamaPLC: SGP Sensirion TVOC/VOC sensors with I²C communication	2026/04/15 19:41	sgp30, sgp40, sgp41, sensirion, gas-sensor, i ² c, communication, sensor, arduino, code, eco ₂ , voc, tvoc, indoor air quality, iaq, nox, hydrogen
• LamaPLC: SHT Sensirion Temperature/humidity sensor with I²C communication	2026/04/23 21:52	sht20, sht21, sht25, sht30, sht31, sht35, sht40, gy21, temperature, humidity, i ² c, communication, sensor, arduino, code

- [LamaPLC: Texas Instruments ADCs: Delta-sigma multi-channel Analog Converters with SPI communication](#) 2026/04/23 21:52 [ads111x](#), [ads12xx](#), [delta-sigma](#), [converter](#), [texas instruments](#), [adc](#), [spi](#), [communication](#), [sensor](#), [arduino](#), [code](#), [ads1110](#), [ads1112](#), [ads1113](#), [ads1114](#), [ads1115](#), [ads1118](#), [ads1119](#), [ads1220](#), [ads1232](#), [ads1234](#), [ads1256](#), [ads1261](#), [ads1263](#), [multi channel](#)
- [LamaPLC: TOFnnnC STMicroelectronics Time-of-Flight \(ToF\) sensors with I²C communication](#) 2026/04/23 21:52 [tof050c](#), [vl6180](#), [tof200c](#), [vl53l0x](#), [tof400c](#), [vl53l1x](#), [stmicroelectronics](#), [time-of-flight](#), [tof](#), [i2c](#), [communication](#), [sensor](#), [arduino](#), [code](#)
- [LamaPLC: UICPAL Temp.humi.sensor](#) 2023/06/25 00:43 [simatic](#), [s7](#), [modbus](#), [communication](#), [temperature](#), [humidity](#), [sensor](#)
- [LamaPLC: VL53Lnn STMicroelectronics time-of-flight \(ToF\) laser-ranging sensors with I²C communication](#) 2026/04/23 21:52 [vl53l0x](#), [vl53l1x](#), [vl53l0 1xv2](#), [gy-530](#), [time-of-flight](#), [tof](#), [laser-ranging](#), [i2c](#), [communication](#), [sensor](#), [arduino](#), [code](#)
- [LamaPLC: VL6180X STMicroelectronics Time-of-Flight \(ToF\) sensor with I²C communication](#) 2026/04/23 21:52 [vl6180x](#), [stmicroelectronics](#), [time-of-flight](#), [tof](#), [i2c](#), [communication](#), [sensor](#), [arduino](#), [code](#)
- [LamaPLC: Waveshare TOF Laser Range Sensor with UART / I²C communication](#) 2026/04/23 21:52 [distance measurement](#), [laser](#), [range](#), [sensor](#), [tof](#), [waveshare](#)
- [lamaPLC: XGZP68xx: Silicon Pressure Sensors/Module](#) 2026/05/15 15:17 [communication](#), [i2c](#), [sensor](#), [modul](#), [pressure](#), [cfsensor](#), [xgzp68xx](#), [xgzp6810d](#), [xgzp6857d](#), [xgzp6859d](#), [xgzp6887d](#), [xgzp6897d](#), [xgzp6899a](#), [piezoresistive](#), [capacitive](#)
- [lamaPLC: YR-3180 - Weight sensor module with UART or Modbus communication](#) 2026/02/15 00:00 [communication](#), [modbus](#), [rtu](#), [sensor](#), [weight](#), [yr-3180](#), [hx710b](#), [arduino](#), [ttl](#), [rs-485](#)
- [LM393: Dual differential comparator \(flame, light, sound sensors\)](#) 2026/05/12 22:18 [communication](#), [analog](#), [lm393](#), [lm-393](#), [flame](#), [ir](#), [sound](#), [hall](#), [sensor](#), [ky-026](#), [hw-484](#), [ky-037](#), [ky-038](#), [fc-03](#), [hc-89](#), [ky-024](#), [modul](#)
- [Magnetic angle sensors](#) 2026/04/23 21:52 [magnetic angle sensor](#), [magnetic flux](#), [sensor](#), [spi](#), [i2c](#), [pwm](#), [communication](#), [modul](#), [as5047p](#), [as5600](#), [mt6701](#), [mt6816](#), [mt6835](#), [tle5012b](#), [amr](#), [gmr](#), [tmr](#), [anisotropic magnetoresistive](#)
- [NT18B07: 7 Kanal RS485 Temperatur Sensor with Modbus RTU](#) 2026/02/14 18:49 [nt18b07](#), [sensor](#), [modbus](#), [rtu](#), [rs-485](#), [communication](#), [platine](#)
- [PT100 / PT1000 sensors](#) 2026/04/23 21:52 [rtd](#), [pt100](#), [pt1000](#), [sensor](#), [temperature](#)
- [Radar Module RD-xx](#) 2026/04/23 21:52 [radar](#), [s3km1110](#), [fmcw](#), [rd-03](#), [k-band](#), [24 ghz](#), [sensor](#), [distance](#), [micro-movements](#)

[radar](#), [S3KM1110](#), [FMCW](#), [RD-01](#), [RD-03](#), [RD-03D](#), [Ai-Thinker](#), [K-band](#), [24 GHz](#), [sensor](#), [distance](#), [micro-movements](#)

This page has been accessed for: Today: 6, Until now: 384

From:

<https://lamaplc.com/> - **lamaPLC**

Permanent link:

<https://lamaplc.com/doku.php?id=sensor:rdxx>

Last update: **2026/04/21 20:47**

